

ATKOMATIC

15400 Series

Bronze, Semi-direct Lift, Pressure 0 to 300 psig (21 bar)
Low Pressure Valve Configurable for Variety of Fluid Applications



Features

- Semi-direct lift action for operation down to zero pressure differential
- Operation up to 300 psi (21 bar)
- Bronze valve material (naval M bronze)
- Available normally closed or normally open
- Media temperatures from -423°F to $+500^{\circ}\text{F}$ (-253°C to $+260^{\circ}\text{C}$)
- Will handle fluids with viscosity up to 150 SUS
- Suitable for use with wide variety of fluid including: air, gasses, liquids, hydraulic fluids, steam, cryogenic fluids, and fluid not harmful to bronze
- Optional seat materials of Teflon®, Kel-F®, Buna N, Viton®, EPR, or metal (316 stainless steel pilot and/or brass piston seat) depending on fluid type and pressure
- Body seal materials of Teflon®, Viton®, Buna N, or EPR
- Pipe sizes from $\frac{1}{4}$ " through $1\frac{1}{2}$ " NPT
- British BSPT ports are available
- Full ported valves: Cv from 1.1 through 21.5
- Coils housings available in NEMA 1 (standard), NEMA 4 (waterproof), NEMA 7 (explosion-proof for hazardous locations), and combination NEMA 4 & 7
- Manual opening and throttling devices are available as options
- Valve position indicator option is available
- Class B coils are available for media temperatures of 0°F through 220°F
- Class H coils are available: recommended for media temperatures of -423°F (-253°C) through $+500^{\circ}\text{F}$ ($+260^{\circ}\text{C}$)
- Treated 416 stainless steel plunge material for increased corrosion resistance

Operational Pressures (No minimum pressure differential)

GASES		LIQUIDS TO 40 SUS		LIQUIDS OVER 40 SUS		STEAM	
AC	DC	AC	DC	AC	DC	AC	DC
300 / 21 bar	300 / 21 bar	300 / 21 bar	300 / 21 bar	300 / 21 bar	300 / 21 bar	125 / 9 bar	125 / 9 bar

Note: Normally open valves are rated for intermittent duty only on 15000 Series valves and are not recommended for cryogenic service above 50 psig

Circle Seal Controls

2301 Wardlow Circle • P.O. Box 3300 • Corona, CA 92880


Phone (951) 270-6200 Fax (951) 270-6201

www.circle-seal.com • am_sales@circle-seal.com • ind_sales@circle-seal.com

atkomatic solenoid

15400 Series

Dimensions (inches), Shipping Weights and Cv Flow Factors

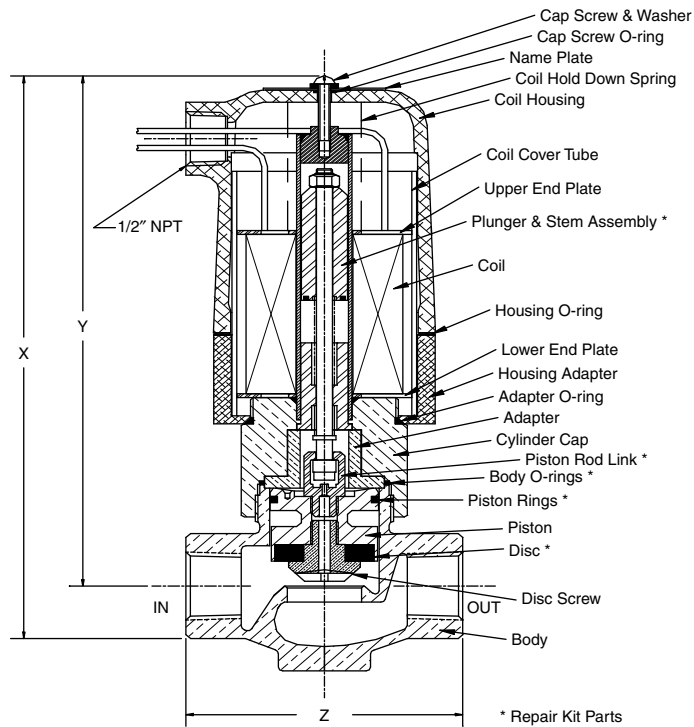

15447 1" normally open valve, shown with a waterproof NEMA 4 coil housing and a soft pilot seat


15400 Series Normally Closed Bronze

CATALOG NUM. PREFIX		PIPE SIZE	MAIN SEAT ORIFICE	X	Y	Z	SHIPPING WEIGHT (lbs)	Cv
15400	15408	1/4"	1/2"	7 5/16"	6 1/2"	2 1/16"	5	1.4
15410	15418	3/8"	1/2"	7 5/16"	6 1/2"	2 1/16"	5	2.7
15420	15428	1/2"	1/2"	7 7/16"	6 1/2"	3"	6	3.5
15430	15438	3/4"	1"	7 15/16"	6 3/8"	3 3/4"	7	7.5
15440	15448	1"	1"	7 15/16"	6 5/8"	3 3/4"	7	9.1
—	15458	1 1/4"	1 1/2"	9 13/16"	8"	5 1/16"	20	19.5
—	15468	1 1/2"	1 1/2"	9 13/16"	8"	5 1/16"	20	21.0

Note: 1 1/4" & 1 1/2" valves have aluminum pistons (for reduced weight) and are not suitable for steam, water and other media harmful to aluminum.

15400 Series

Dimensions (inches), Shipping Weights and Cv Flow Factors

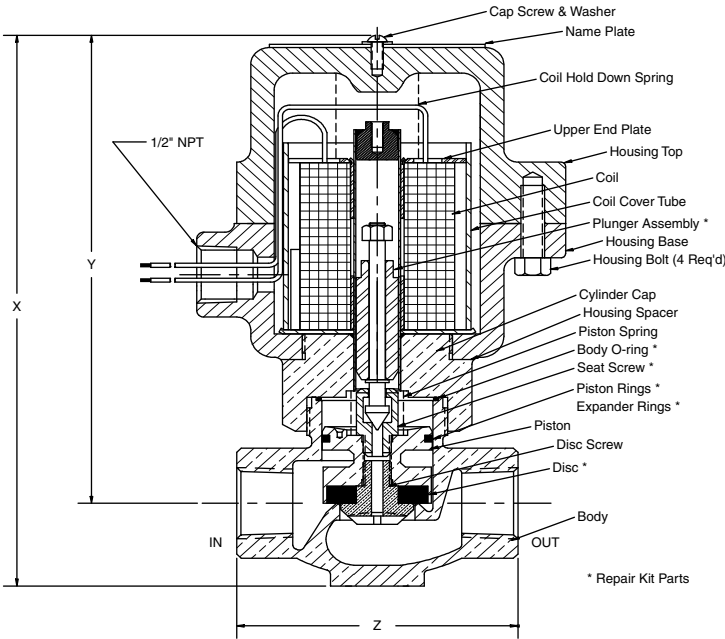

15448 1" normally closed valve, shown with a explosion-proof NEMA 7 coil housing and a metal pilot seat

15400 Series Normally Open Bronze

CATALOG NUM. PREFIX		PIPE SIZE	MAIN SEAT ORIFICE	X	Y	Z	SHIPPING WEIGHT (lbs)	Cv
15401	15407	1/4"	1/2"	9 3/32"	8 3/16"	2 1/16"	5	1.4
15411	15417	3/8"	1/2"	9 3/32"	8 3/16"	2 1/16"	5	2.7
15421	15427	1/2"	1/2"	9 3/16"	8 3/16"	3"	6	3.5
15431	15437	3/4"	1"	9 1/2"	8 1/4"	3 3/4"	7	7.5
15441	15447	1"	1"	9 1/2"	8 1/4"	3 3/4"	7	9.1

15400 Series

How to Order

154 x x - x x x x x x x x x x

CONNECTION SIZE ————
0 ¼" pipe **1** ⅜" pipe
2 ½" pipe **3** ¾" pipe
4 1" pipe **5** 1¼" pipe
6 1½" pipe

VALVE NORMAL POSITION ————
0 Normally closed & Class B coil
1 Normally open & Class B coil
7 Normally open & Class H coil
8 Normally closed & Class H coil

VOLTAGE AC/60 Hz ————
0 AC/50Hz or DC voltage
1 24 VAC **2** 100 VAC **3** 115 VAC
4 200 VAC **5** 230 VAC **6** 460 VAC

VOLTAGE AC/50 Hz ————
0 AC/60 Hz or DC voltage
1 24 VAC **2** 110 VAC
3 220 VAC **4** 380 VAC

VOLTAGE DC ————
0 AC voltage
1 12 VDC **2** 24 VDC **3** 32 VDC
4 72 VDC **5** 125 VDC **6** 250 VDC

COIL INSULATION RATING ————
B Class B (155° C)
H Class H (180° C)

CONNECTION TYPE ————
P NPT
J British pipe thread

OPTIONS
P Position indicator
M Manual opening
T Manual throttling

COIL HOUSING
E Explosion-proof
S Standard
W Waterproof
C Combined water- & explosion-proof

FLUID MEDIA TYPE
1 Gas
2 Liquid up to 40 SUS
3 Liquid from 41 SUS to 150 SUS
4 Steam
5 Cryogenic

SEAL MATERIAL
A Teflon® **B** Buna N
C Viton® **D** EPR

SEAT/PILOT MATERIAL
A TFE pilot & TFE disc
B Buna N pilot & Buna N disc
C Viton® pilot & Viton® disc
D EPR pilot & EPR disc
E Kel-F® pilot & Kel-F® disc
F Metal pilot & metal disc
G Metal pilot & TFE disc
H Metal pilot & Buna N disc
I Metal pilot & Viton® disc
J Metal pilot & EPR disc
L Metal pilot & Kel-F® disc

MAX. OPERATING PRESSURE (psig)
A 100 **E** 250
B 125 **F** 300
C 150 **M** 50
D 200

Note: For PED applications, the 15400 Series is only approved for room temperature applications.

Viton® is a registered trademark of DuPont Dow Elastomers.

Teflon® is a registered trademark of DuPont.

Kel-F® is a registered trademark of 3M Company.